


Solid carbide end mills - Micro Long
VHM - Schaftfräser - Micro Lang
Fraises en bout carbure - Micro Longue
Karbür Freze - Micro Uzun

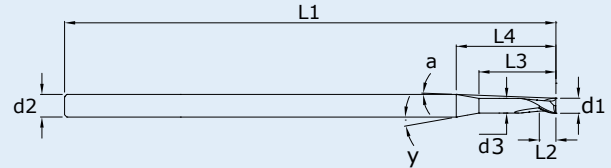

F	E	0100	G	2	K	65	A	00	N	020
END MILL	MG-10		DIN 6528							
TYPE	QUALITY	DIAMETER	NORM	FLUTES	SHAFT TYPE	FULL LENGTH	HELICAL	CHAMFER	COATED	FLUTE LENGTH

d1 (±0.003/0.005)	L2	L3	L4	d3	L1	d2(h6)	Z	y°	a°	Coated Code	Price (Euro)
0.2	0.3	0.4	11.9	0.19	65	3	2	7.0°	6.71°	FE0020G2K65A00N004	
0.2	0.3	0.8	12.3	0.19	65	3	2	7.0°	6.50°	FE0020G2K65A00N008	
0.2	0.3	1.2	9.2	0.19	65	3	2	10.0°	8.61°	FE0020G2K65A00N012	
0.2	0.3	2.0	10.0	0.19	65	3	2	10.0°	7.94°	FE0020G2K65A00N020	
0.3	0.5	0.6	11.8	0.29	65	3	2	7.0°	6.56°	FE0030G2K65A00N006	
0.3	0.5	1.2	9.0	0.29	65	3	2	10.0°	8.53°	FE0030G2K65A00N012	
0.3	0.5	2.4	10.2	0.29	65	3	2	10.0°	7.57°	FE0030G2K65A00N024	
0.3	0.5	3.0	10.8	0.29	65	3	2	10.0°	7.12°	FE0030G2K65A00N030	
0.4	0.6	0.8	11.6	0.38	65	3	2	7.0°	6.40°	FE0040G2K65A00N008	
0.4	0.6	1.6	9.2	0.38	65	3	2	10.0°	8.70°	FE0040G2K65A00N016	
0.4	0.6	3.2	10.8	0.38	65	3	2	10.0°	6.88°	FE0040G2K65A00N032	
0.4	0.6	4.0	11.6	0.38	65	3	2	10.0°	6.41°	FE0040G2K65A00N040	
0.5	0.8	1.0	11.4	0.48	65	3	2	7.0°	6.17°	FE0050G2K65A00N010	
0.5	0.8	2.0	9.3	0.48	65	3	2	10.0°	7.63°	FE0050G2K65A00N020	
0.5	0.8	4.0	11.3	0.48	65	3	2	10.0°	6.30°	FE0050G2K65A00N040	
0.5	0.8	6.0	13.3	0.48	65	3	2	10.0°	5.36°	FE0050G2K65A00N060	
0.6	0.9	1.2	11.3	0.57	65	3	2	7.0°	6.10°	FE0060G2K65A00N012	
0.6	0.9	2.0	9.1	0.57	65	3	2	10.0°	7.52°	FE0060G2K65A00N020	
0.6	0.9	4.0	11.1	0.57	65	3	2	10.0°	6.18°	FE0060G2K65A00N040	
0.6	0.9	8.0	15.1	0.57	65	3	2	10.0°	4.55°	FE0060G2K65A00N080	
0.7	1.1	1.4	11.1	0.67	65	3	2	7.0°	5.90°	FE0070G2K65A00N014	
0.7	1.1	2.5	9.4	0.67	65	3	2	10.0°	6.99°	FE0070G2K65A00N025	
0.7	1.1	5.0	11.9	0.67	65	3	2	10.0°	5.54°	FE0070G2K65A00N050	
0.7	1.1	8.0	14.9	0.67	65	3	2	10.0°	4.43°	FE0070G2K65A00N080	
0.8	1.2	2.0	8.6	0.76	65	3	2	10.0°	7.61°	FE0080G2K65A00N020	
0.8	1.2	3.0	9.6	0.76	65	3	2	10.0°	6.51°	FE0080G2K65A00N030	
0.8	1.2	6.0	12.6	0.76	65	3	2	10.0°	4.98°	FE0080G2K65A00N060	
0.8	1.2	10.0	16.6	0.76	65	3	2	10.0°	3.44°	FE0080G2K65A00N100	
1.0	1.5	2.0	8.2	0.95	65	3	2	10.0°	6.98°	FE0100G2K65A00N020	
1.0	1.5	4.0	10.2	0.95	65	3	2	10.0°	5.62°	FE0100G2K65A00N040	
1.0	1.5	8.0	14.2	0.95	65	3	2	10.0°	4.40°	FE0100G2K65A00N080	
1.0	1.5	12.0	18.2	0.95	65	3	2	10.0°	3.16°	FE0100G2K65A00N120	
1.0	1.5	16.0	22.2	0.95	65	3	2	10.0°	2.59°	FE0100G2K65A00N160	
1.0	1.5	20.0	26.2	0.95	65	3	2	10.0°	2.19°	FE0100G2K65A00N200	
1.2	1.8	2.0	7.7	1.14	65	3	2	10.0°	6.67°	FE0120G2K65A00N020	
1.2	1.8	4.0	9.7	1.14	65	3	2	10.0°	5.31°	FE0120G2K65A00N040	
1.5	2.3	4.0	9.0	1.43	65	3	2	10.0°	4.76°	FE0150G2K65A00N040	
1.5	2.3	8.0	13.0	1.43	65	3	2	10.0°	3.30°	FE0150G2K65A00N080	
1.5	2.3	12.0	17.0	1.43	65	3	2	10.0°	2.52°	FE0150G2K65A00N120	
1.5	2.3	20.0	25.0	1.43	65	3	2	10.0°	1.72°	FE0150G2K65A00N200	
2.0	3.0	4.0	7.8	1.90	65	3	4	10.0°	3.65°	FE0200G4K65A00N040	
2.0	3.0	8.0	11.8	1.90	65	3	4	10.0°	2.42°	FE0200G4K65A00N080	
2.0	3.0	12.0	15.8	1.90	65	3	4	10.0°	1.81°	FE0200G4K65A00N120	
2.0	4.0	16.0	19.8	1.90	65	3	4	10.0°	1.45°	FE0200G4K65A00N160	
2.0	4.0	20.0	23.8	1.90	65	3	4	10.0°	1.21°	FE0200G4K65A00N200	

|--|