
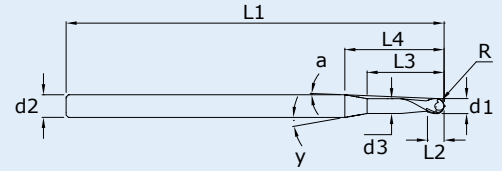


Solid carbide ball nose end mills - Micro
VHM - Radiusfräser - Micro
Fraises a rayon carbure - Micro
Karbür Küre Freze - Micro



F	E	0100	R	2	K	40	A	50	N	020
END MILL	MG-10		DIN 6528							
TYPE	QUALITY	DIAMETER	NORM	FLUTES	SHAFT TYPE	FULL LENGTH	HELICAL	RADIUS	COATED	FLUTE LENGTH

d1(±0.003/0.005)	L2	L3	L4	d3	L1	d2(h6)	Z	y°	a°	R	Coated Code	Price (Euro)
0,2	0,3	0,4	11,9	0,19	40	3	2	7,0°	6,71°	0,10	FE0020R2K40A10N004	
0,2	0,3	0,8	12,3	0,19	40	3	2	7,0°	6,50°	0,10	FE0020R2K40A10N008	
0,2	0,3	1,2	9,2	0,19	40	3	2	10,0°	8,61°	0,10	FE0020R2K40A10N012	
0,2	0,3	2,0	10,0	0,19	40	3	2	10,0°	7,94°	0,10	FE0020R2K40A10N020	
0,3	0,5	0,6	11,8	0,29	40	3	2	7,0°	6,56°	0,15	FE0030R2K40A15N006	
0,3	0,5	1,2	9,0	0,29	40	3	2	10,0°	8,53°	0,15	FE0030R2K40A15N012	
0,3	0,5	2,4	10,2	0,29	40	3	2	10,0°	7,57°	0,15	FE0030R2K40A15N024	
0,3	0,5	3,0	10,8	0,29	40	3	2	10,0°	7,12°	0,15	FE0030R2K40A15N030	
0,4	0,6	0,8	11,6	0,38	40	3	2	7,0°	6,40°	0,20	FE0040R2K40A20N008	
0,4	0,6	1,6	9,2	0,38	40	3	2	10,0°	8,70°	0,20	FE0040R2K40A20N016	
0,4	0,6	3,2	10,8	0,38	40	3	2	10,0°	6,88°	0,20	FE0040R2K40A20N032	
0,4	0,6	4,0	11,6	0,38	40	3	2	10,0°	6,41°	0,20	FE0040R2K40A20N040	
0,5	0,8	1,0	11,4	0,48	40	3	2	7,0°	6,17°	0,25	FE0050R2K40A25N010	
0,5	0,8	2,0	9,3	0,48	40	3	2	10,0°	7,63°	0,25	FE0050R2K40A25N020	
0,5	0,8	4,0	11,3	0,48	40	3	2	10,0°	6,30°	0,25	FE0050R2K40A25N040	
0,5	0,8	6,0	13,3	0,48	40	3	2	10,0°	5,36°	0,25	FE0050R2K40A25N060	
0,6	0,9	1,2	11,3	0,57	40	3	2	7,0°	6,10°	0,30	FE0060R2K40A30N012	
0,6	0,9	2,0	9,1	0,57	40	3	2	10,0°	7,52°	0,30	FE0060R2K40A30N020	
0,6	0,9	4,0	11,1	0,57	40	3	2	10,0°	6,18°	0,30	FE0060R2K40A30N040	
0,6	0,9	8,0	15,1	0,57	40	3	2	10,0°	4,55°	0,30	FE0060R2K40A30N080	
0,7	1,1	1,4	11,1	0,67	40	3	2	7,0°	5,90°	0,35	FE0070R2K40A35N014	
0,7	1,1	2,5	9,4	0,67	40	3	2	10,0°	6,99°	0,35	FE0070R2K40A35N025	
0,7	1,1	5,0	11,9	0,67	40	3	2	10,0°	5,54°	0,35	FE0070R2K40A35N050	
0,7	1,1	8,0	14,9	0,67	40	3	2	10,0°	4,43°	0,35	FE0070R2K40A35N080	
0,8	1,2	2,0	8,6	0,76	40	3	2	10,0°	7,61°	0,40	FE0080R2K40A40N020	
0,8	1,2	3,0	9,6	0,76	40	3	2	10,0°	6,51°	0,40	FE0080R2K40A40N030	
0,8	1,2	6,0	12,6	0,76	40	3	2	10,0°	4,98°	0,40	FE0080R2K40A40N060	
0,8	1,2	10,0	16,6	0,76	50	3	2	10,0°	3,44°	0,40	FE0080R2K50A40N100	
1,0	1,5	2,0	8,2	0,95	40	3	2	10,0°	6,98°	0,50	FE0100R2K40A50N020	
1,0	1,5	4,0	10,2	0,95	40	3	2	10,0°	5,62°	0,50	FE0100R2K40A50N040	
1,0	1,5	8,0	14,2	0,95	40	3	2	10,0°	4,40°	0,50	FE0100R2K40A50N080	
1,0	1,5	12,0	18,2	0,95	50	3	2	10,0°	3,16°	0,50	FE0100R2K50A50N120	
1,0	1,5	16,0	22,2	0,95	50	3	2	10,0°	2,59°	0,50	FE0100R2K50A50N160	
1,0	1,5	20,0	26,2	0,95	50	3	2	10,0°	2,19°	0,50	FE0100R2K50A50N200	
1,2	1,8	2,0	7,7	1,14	40	3	2	10,0°	6,67°	0,60	FE0120R2K40A60N020	
1,2	1,8	4,0	9,7	1,14	40	3	2	10,0°	5,31°	0,60	FE0120R2K40A60N040	
1,5	2,3	4,0	9,0	1,43	40	3	2	10,0°	4,76°	0,75	FE0150R2K40A75N040	
1,5	2,3	8,0	13,0	1,43	40	3	2	10,0°	3,30°	0,75	FE0150R2K40A75N080	
1,5	2,3	12,0	17,0	1,43	50	3	2	10,0°	2,52°	0,75	FE0150R2K50A75N120	
1,5	2,3	20,0	25,0	1,43	50	3	2	10,0°	1,72°	0,75	FE0150R2K50A75N200	
2,0	3,0	4,0	7,8	1,90	40	3	2	10,0°	3,65°	1,00	FE0200R2K40A10N040	
2,0	3,0	8,0	11,8	1,90	40	3	2	10,0°	2,42°	1,00	FE0200R2K40A10N080	
2,0	3,0	12,0	15,8	1,90	50	3	2	10,0°	1,81°	1,00	FE0200R2K50A10N120	
2,0	4,0	16,0	19,8	1,90	50	3	2	10,0°	1,45°	1,00	FE0200R2K50A10N160	
2,0	4,0	20,0	23,8	1,90	50	3	2	10,0°	1,21°	1,00	FE0200R2K50A10N200	