


Solid carbide end mills with corner radius - Micro
VHM - Schaftfräser mit Eckenradius - Micro
Fraises toriques carbure - Micro
Karbür Köşe Radyüslü Freze - Micro

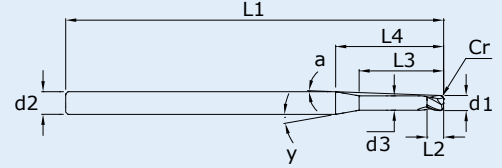

F	E	0100	K	2	K	40	A	20	N	020
END MILL	MG-10		TOOLEX							
TYPE	QUALITY	DIAMETER	CORNER RADIUS	FLUTES	SHAFT TYPE	FULL LENGTH	HELICAL	CORNER RADIUS	COATED	FLUTE LENGTH

d1(±0,003 -0,005)	L2	L3	L4	d3	L1	d2(h6)	Z	y°	a°	Cr	Coated Code	Price (Euro)
0,5	0,8	1,0	11,4	0,48	40	3	2	7,0°	6,17°	0,10	FE0050K2K40A10N010	
0,5	0,8	2,0	9,3	0,48	40	3	2	10,0°	7,63°	0,10	FE0050K2K40A10N020	
0,5	0,8	4,0	11,3	0,48	40	3	2	10,0°	6,30°	0,10	FE0050K2K40A10N040	
0,5	0,8	6,0	13,3	0,48	40	3	2	10,0°	5,36°	0,10	FE0050K2K40A10N060	
0,6	0,9	1,2	11,3	0,57	40	3	2	7,0°	6,10°	0,10	FE0060K2K40A10N012	
0,6	0,9	2,0	9,1	0,57	40	3	2	10,0°	7,52°	0,10	FE0060K2K40A10N020	
0,6	0,9	4,0	11,1	0,57	40	3	2	10,0°	6,18°	0,10	FE0060K2K40A10N040	
0,6	0,9	8,0	15,1	0,57	40	3	2	10,0°	4,55°	0,10	FE0060K2K40A10N080	
0,7	1,1	1,4	11,1	0,67	40	3	2	7,0°	5,90°	0,10	FE0070K2K40A10N014	
0,7	1,1	2,5	9,4	0,67	40	3	2	10,0°	6,99°	0,10	FE0070K2K40A10N025	
0,7	1,1	5,0	11,9	0,67	40	3	2	10,0°	5,54°	0,10	FE0070K2K40A10N050	
0,7	1,1	8,0	14,9	0,67	40	3	2	10,0°	4,43°	0,10	FE0070K2K40A10N080	
0,8	1,2	2,0	8,6	0,76	40	3	2	10,0°	7,61°	0,15	FE0080K2K40A15N020	
0,8	1,2	3,0	9,6	0,76	40	3	2	10,0°	6,51°	0,15	FE0080K2K40A15N030	
0,8	1,2	6,0	12,6	0,76	40	3	2	10,0°	4,98°	0,15	FE0080K2K40A15N060	
0,8	1,2	10,0	16,6	0,76	50	3	2	10,0°	3,44°	0,15	FE0080K2K50A15N100	
1,0	1,5	2,0	8,2	0,95	40	3	2	10,0°	6,98°	0,20	FE0100K2K40A20N020	
1,0	1,5	4,0	10,2	0,95	40	3	2	10,0°	5,62°	0,20	FE0100K2K40A20N040	
1,0	1,5	8,0	14,2	0,95	40	3	2	10,0°	4,40°	0,20	FE0100K2K40A20N080	
1,0	1,5	12,0	18,2	0,95	50	3	2	10,0°	3,16°	0,20	FE0100K2K50A20N120	
1,0	1,5	16,0	22,2	0,95	50	3	2	10,0°	2,59°	0,20	FE0100K2K50A20N160	
1,0	1,5	20,0	26,2	0,95	50	3	2	10,0°	2,19°	0,20	FE0100K2K50A20N200	
1,2	1,8	2,0	7,7	1,14	40	3	2	10,0°	6,67°	0,25	FE0120K2K40A25N020	
1,2	1,8	4,0	9,7	1,14	40	3	2	10,0°	5,31°	0,25	FE0120K2K40A25N040	
1,5	2,3	4,0	9,0	1,43	40	3	2	10,0°	4,76°	0,30	FE0150K2K40A30N040	
1,5	2,3	8,0	13,0	1,43	40	3	2	10,0°	3,30°	0,30	FE0150K2K40A30N080	
1,5	2,3	12,0	17,0	1,43	50	3	2	10,0°	2,52°	0,30	FE0150K2K50A30N120	
1,5	2,3	20,0	25,0	1,43	50	3	2	10,0°	1,72°	0,30	FE0150K2K50A30N200	
2,0	3,0	4,0	7,8	1,90	40	3	4	10,0°	3,65°	0,50	FE0200K4K40A50N040	
2,0	3,0	8,0	11,8	1,90	40	3	4	10,0°	2,42°	0,50	FE0200K4K40A50N080	
2,0	3,0	12,0	15,8	1,90	50	3	4	10,0°	1,81°	0,50	FE0200K4K50A50N120	
2,0	4,0	16,0	19,8	1,90	50	3	4	10,0°	1,45°	0,50	FE0200K4K50A50N160	
2,0	4,0	20,0	23,8	1,90	50	3	4	10,0°	1,21°	0,50	FE0200K4K50A50N200	

																				
$a_p = d_1 \times 0,1$ $a_e = d_1$	$a_p = d_1$ $a_e = d_1 \times 0,1$	  	  	  	  	  	  	  	  											
																				
																				
																				
																				
