




Solid carbide Center drills
VHM - Zentrierbohrer
Mèche à Centrer carbure
Karbür Punta Matkab

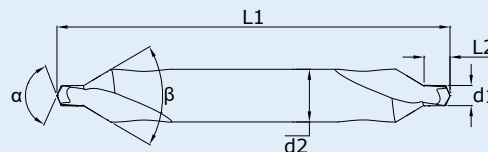

P	S	0400	T	2	C	05	F	60	N	056
CENTER DRILL	MG-10		TOOLEX							
TYPE	QUALITY	DIAMETER	NORM	FLUTES	SHAFT TYPE	FLUTE LENGTH	HELICAL	EDGE ANGEL	COATED	FULL LENGTH

d1(e8)	L2	L1	d2(h6)	Z	β	Uncoated Code	Price (Euro)	Coated Code	Price (Euro)
1,00	1,3	40	3	2	60°	PS0100T2C01F60B040		PS0100T2C01F60N040	
1,25	1,6	40	3	2	60°	PS0125T2C02F60B040		PS0125T2C02F60N040	
1,60	2,0	40	4	2	60°	PS0160T2C02F60B040		PS0160T2C02F60N040	
2,00	2,5	40	5	2	60°	PS0200T2C02F60B040		PS0200T2C02F60N040	
2,50	3,1	45	6	2	60°	PS0250T2C03F60B045		PS0250T2C03F60N045	
3,15	3,9	50	8	2	60°	PS0315T2C04F60B050		PS0315T2C04F60N050	
4,00	5,0	56	10	2	60°	PS0400T2C05F60B056		PS0400T2C05F60N056	
5,00	6,3	63	12	2	60°	PS0500T2C06F60B063		PS0500T2C06F60N063	
6,30	8,0	71	16	2	60°	PS0630T2C08F60B071		PS0630T2C08F60N071	
8,00	10,1	80	20	2	60°	PS0800T2C10F60B080		PS0800T2C10F60N080	

	HRC 20-30	HRC 30-40	INOX	GG	AL	CU	TITAN	< 52 HRC																
	1.0050-2 1.0060-2 1.0070-2	1.5864 1.6580 1.7225	1.4405 1.4460 1.4505	0.6035 0.7080 0.8055	3.2151 3.2373 3.2382	2.1247 2.0580 2.0598	3.7035 3.7055 3.7065	1.3255 1.3265 1.3333																
	Vc=130 m/dk.			Vc=120 m/dk.			Vc=300 m/dk.			Vc=220 m/dk.			Vc=50 m/dk.			Vc=40 m/dk.								
d1	fz	n	Vf	fz	n	Vf	fz	n	Vf	fz	n	Vf	fz	n	Vf	fz	n	Vf						
2	0,02	4777	191	0,006	3980	47	0,003	3388	14	0,01	4378	87	0,05	11942	119	0,02	9554	82	0,003	1592	9	0,002	1273	5
3	0,03	3184	191	0,008	2653	42	0,004	1592	12	0,01	2919	58	0,08	7961	127	0,03	6369	82	0,006	1061	12	0,003	849	5
4	0,04	2384	191	0,010	1990	39	0,004	1194	9	0,02	2189	87	0,10	5971	119	0,04	4777	82	0,009	796	14	0,004	636	5
5	0,04	1910	152	0,010	1592	31	0,005	955	9	0,02	1751	70	0,14	4777	133	0,05	3821	82	0,010	636	12	0,005	509	5
6	0,05	1592	159	0,012	1326	31	0,006	796	9	0,03	1459	87	0,18	3980	143	0,06	3184	82	0,010	530	10	0,005	424	4
7	0,05	1364	136	0,015	1137	34	0,007	682	9	0,03	1251	75	0,22	3412	150	0,06	2729	82	0,010	454	9	0,006	363	4
8	0,06	1194	143	0,018	995	35	0,008	597	9	0,04	1094	87	0,25	2985	149	0,07	2388	82	0,012	398	9	0,006	318	3